



product details

QT-M 2X26-42/220-240 S

Product description: QT-M 2X26-42/220-240 S
 Product code: 4008321110039
 Quantity: Shipping carton box (VS) contains 20 Piece (PCE)

You can find this product in the eCatalog:

http://catalog.myosram.com?~language=EN&~country=DE&it_p=4008321110039

Applications	
Suitable f. fixtures with prot. class	Class I Class II
Categorizations	
SEG number	7980217
Certificates & Standards	
Approval marks - approval	ENEC 10 VDE VDE-EMC
EEL - Energy Label	A2
Standards	acc. to EN 61347-2-3 acc. to EN 60929 acc. to EN 55015:2006 + A1:2007 acc. to EN 61000-3-2 acc. to EN 61547
Type of protection	IP20
General Description	
Design / version	ECG multiwatt
Logistical Data	
Product weight	280 g
Relative humidity	5...85 % ¹⁾
Temperature range at storage	-40...85 °C
Technical - Electrical Data	
Inrush current	28 A
Maximum mains current	0.39 A
Nominal voltage	220-240 V
Mains frequency	50-60 Hz
DC voltage	176...254 V
Operating frequency	45 kHz ²⁾
Output voltage	430 V
Max. no. of ECGs on circuit breaker 10 A	17
Max. no. of ECGs on circuit breaker 16 A	28
TH full width at half maximum	230 µs
Technical - Geometries	
Length	123.00 mm
Width	79.00 mm
Nominal voltage	33.00 mm
Mounting hole spacing, length	129.5 mm
Mounting hole spacing, width	67 mm
Technical - Light Technical Data	
Rated starting time	warm start

**Technical - Temperatures**

Ambient temperature range	-20...+50 °C
Operating temperature	70 °C
Max. housing temperature in case of fault	110 °C

Packaging units


Product code	Packaging type and content	Dimensions in h x w x l	Gross weight	Volume
4008321110022	Unpacked contains 1 Piece	78,000 mm x 34,000 mm x 123,000 mm	285,750 g (0,000 g)	0,322 Cubic dec.
4008321110039	Shipping carton box contains 20 Piece	260,000 mm x 101,000 mm x 412,000 mm	5.865,000 g (0,000 g)	8,910 Cubic dec.

1) Maximum 56 days/year at 85 %

2) Approximately



Lampenverdrahtung / Lamp wiring:

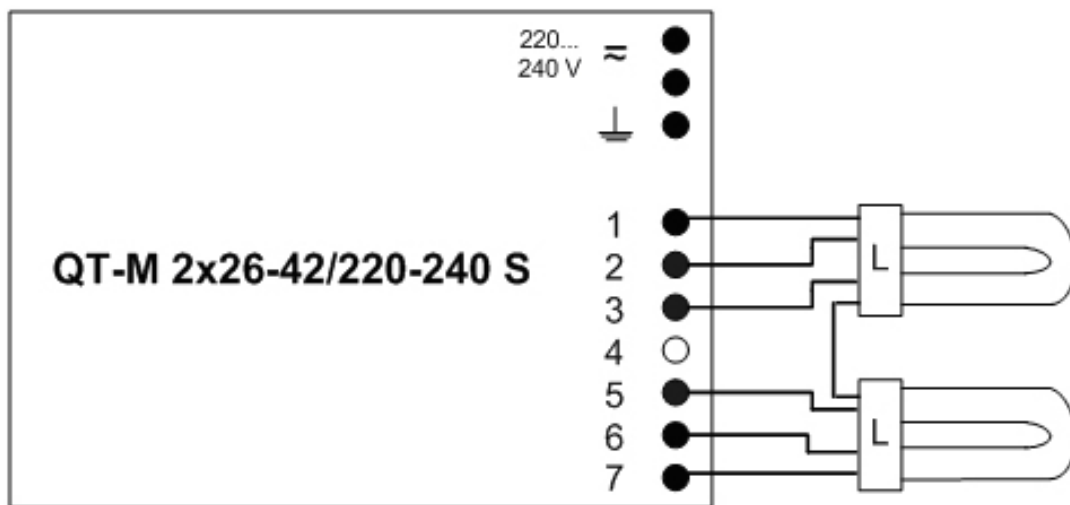

Max. zulässige Leitungslänge zwischen EVG und Lampe: 2.0 m (PIN1;2;3;5); 1.0 m (PIN6;7)

Max. permitted cable length in between ECG and lamp: 2.0 m (PIN1;2;3;5); 1.0 m (PIN6;7)