

## DULUX L 36 W/830 2G11

---

OSRAM DULUX L LUMILUX | CFLni, 1 tube, with 4-pin base for ECG/CCG operation



- Offices, public buildings
- Shops
- Supermarkets and department stores
- Hotels, restaurants
- Industry

### Product benefits

---

- Very economical
- Outstanding luminous flux
- Outstanding luminous efficiency
- Long service life
- OSRAM System+ Guarantee in combination with OSRAM QUICKTRONIC ECG
- Less than half as long as tubular fluorescent lamps
- Improved maintenance

### Product features

---

- Short and compact pin-base lamp with double-turn tubes
- Single-ended four-pin plug-in 2G11 base
- Dimmable (1...100 % with QUICKTRONIC QT<sub>i</sub> DALI/DIM)
- Color rendering index  $R_a$ : 80...89
- Average life: 20,000 h (with QUICKTRONIC)
- Operates on battery, solar and AC power with suitable Electronic Control Gear
- Also available in blue



## Technical data

---

### Electrical data



Nominal wattage	36 W
Rated wattage	36 W

### Light technical data

Color rendering index Ra	80...89
Rated luminous flux	2900 lm
Luminous flux at 25 °C	2900 lm
Light color	830
Color temperature	3000 K
Light color as per EN 12464-1	LUMILUX Warm White
Rated LLMF at 2,000 h	0.93
Rated LLMF at 4,000 h	0.90
Rated LLMF at 6,000 h	0.88
Rated LLMF at 8,000 h	0.86
Rated LLMF at 12,000 h	0.84
Rated LLMF at 16,000 h	0.81
Rated LLMF at 20,000 h	0.80
Luminance	2.8 cd/cm <sup>2</sup>

### Dimensions & weight

Length	417.0 mm
--------	----------

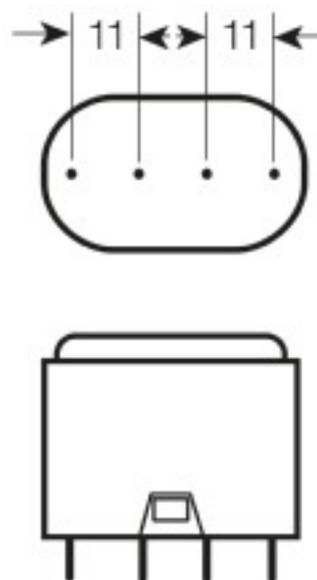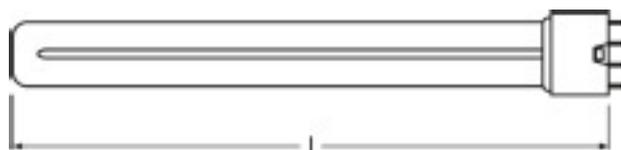

Product line drawing with letters

Base

### Colors & materials

Lamp mercury content	3.0 mg
----------------------	--------

### Temperatures

Rated ambient temp.w.max.luminous flux	25.0 °C
--	---------

### Lifespan

Service life	13000 h <sup>1)</sup>
Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.99
Rated lamp survival factor at 8,000 h	0.99
Rated lamp survival factor at 12,000 h	0.95
Rated lamp survival factor at 16,000 h	0.81
Rated lamp survival factor at 20,000 h	0.50

### Lifespan

Operation mode LLMF/LSF	HF
Lifespan	20000 h <sup>1)</sup>

<sup>1)</sup> With preheat ECG

### Additional product data

Base (standard designation)	2G11
Appropriate disposal acc. to WEEE	Yes


### Capabilities

Suitable for indoor	Yes
---------------------	-----

## Equipment / Accessories

---

- Suitable for standard control gears and starters
- Suitable for operation on electronic and conventional control gear

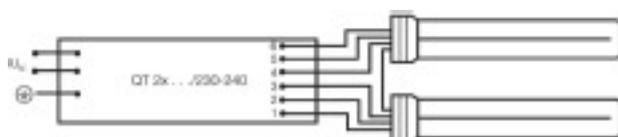


---

*Circuit diagram*



---

*Circuit diagram*

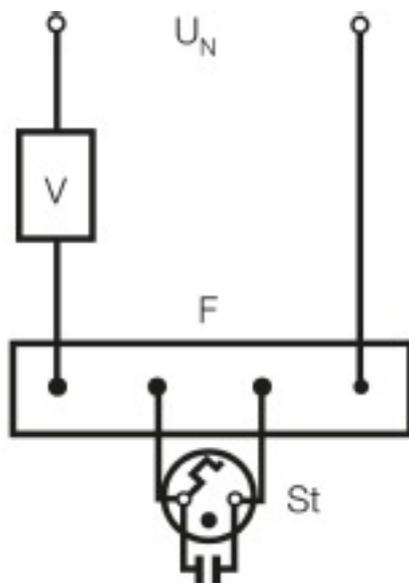

Circuit diagram

## References / Links

---

For more information on QUICKTRONIC electronic control gear go to

- ▶ [www.osram.com/QUICKTRONIC](http://www.osram.com/QUICKTRONIC)

For more information on the system guarantee and the terms and conditions of the guarantee visit

- ▶ [www.osram.com/system-guarantee](http://www.osram.com/system-guarantee)

## Disclaimer

---

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.